

INSTRUCTIONS FOR 9560 "REDHEAD" RING

For Strand lanebeam 650/800/1000, Ianiro Varibeam 800/1000,
DeSisti RC 80/100F, Cosmo RC 80/100F

(Your fixture may differ from the one shown but assembly procedure will be the same.)

CAUTION: This Speed Ring is designed to accept the standard light manufacturer's safety screen. THE SAFETY SCREEN MUST BE USED WITH THIS LIGHT FIXTURE AND SPEED RING COMBINATION.

Mounting Ring to Fixture:

1. If accessory holder is attached to front of fixture, remove it.
2. With Ring in vertical position, loosen all four bottom thumbscrews and remove two inboard screws completely (photo 1).
3. Place Ring over top of fixture making sure rim fits in first, or rear, slot in top Ring brackets (photo 2).
4. With bottom brackets still hanging loose, slide safety screen up into second, or front, slot in top brackets (photo 3).
5. Swing bottom of Ring into place around fixture.
6. Rotate bottom brackets on Ring into position making sure rim on fixture and bottom of safety screen fit into correct slots in brackets (photo 4).
7. Replace and tighten all thumbscrews.
8. Assembled Ring and fixture should appear as shown in photos 5 and 6.




Photo 1




Photo 2




Photo 3



Photo 4




Photo 5



Photo 6

Parts list:

- 1 - 29301000 7.3" metal Speed Ring.
- 4 - 95632000 Mounting blocks
- 8 - 95605000 10-24X1 1/4" brass thumbscrews

CHIMERA 1812 Valtec Lane Boulder CO 80301 (888)444-1812 (303)444-8000 Fax (303)444-8303



2900 SPEED RING INSTRUCTIONS



For the ARRILITE 650/800/1000

CAUTION: TO PROTECT YOUR LIGHTBANK, A SCRIM OR SAFETY SCREEN MUST BE USED WITH THIS LIGHT FIXTURE/SPEED RING COMBINATION.

Installing on the ARRILITE:

- 1, Slide the Speed Ring into the barn door ears on the fixture with the flat side of the Ring facing the safety screen on the fixture. *(Photo 1 below)*
2. Place the bottom of the Ring into the bottom barn door ear and then close the top latch over the top of the Ring. *(Photo 2 below)*

Note: When used with larger sized Lightbanks or Lightbanks with accessories such as soft fabric egg crate grids or barn doors the yoke on the ARRILITE is not sufficient to hold up the weight of the Lightbank, Speed Ring, accessory combination. In this use the Chimera #3770 stand adapter and #3750 grip head. Assemble as shown in Photo 3—below.

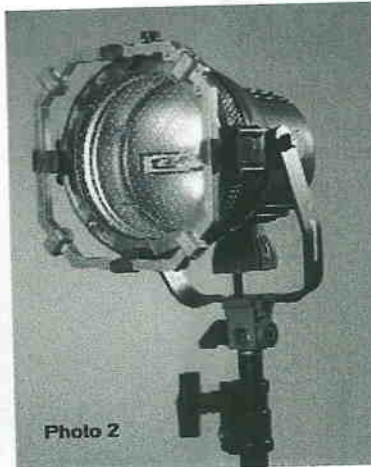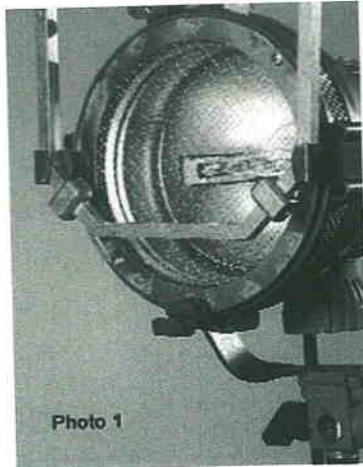

CHIMERA® 1812 VALTEC LANE, BOULDER, COLORADO 80301 USA
TOLL FREE 888-444-1812 PHONE 303-444-8000 FAX 303-444-8303
EMAIL: salesinfo@chimeralighting.com WEB SITE: www.chimeralighting.com

